

t +86-760-22343190 m +86 173 2816 2503 e sales@luna-lighting.cn www.luna-lighting.com

Magnetic linear light length 300mm 15watts DC48V

LUNA Magnetic Track System is a new comprehensive and flexible system to design light in space.


48VDC low-voltage safe power supply, allowing customers to safely put their hands into the track to disassemble and assemble the lamps.

Customers pre-installed the track: Extruded aluminum housing slots, and then matched different surface lighting, spotlights, chandeliers, wall washer and other lamps according to the actual application scene. The light elements snap in place and connect automatically though the magic of magnets.



architectural, commercial, exhibition areas, transit areas, corridors, shops, display windows, service areas, offices, staterooms, schools, halls, households, etc



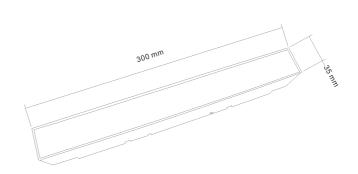

Product model: LN-CMGLINE-300

Electrical

Power 15W

Input voltage DC48V

Frequency

Driver options KEGU, Dadou

Dimming on/off,0/1-10V,DALI,Mesh

Class III SELV

Ambient temperature O - 40°C

Relative humidity <85%

LED

LED brand options CREE,OSRAM,PHILIPS

LED Qty 5

LED type SMD3030

C.C.T. **3000K,4000K,6000K**

CRI >80,>90

Lumen maintenance LM80

SDCM 4

Optical

Beam angle ° 15,24,36

Luminous flux (LED)* lm 1875

Lumen efficiency (LED)* lm/W 125

Luminous flux (Luminare)* lm 1350

Lumen efficiency (Luminare)* Im/W 90

Material

Housing ABS gear box

Optics Optical PMMA

Surface treament Powder coated

Color options Matt Black

IP grade IP20

Installation

Location Interior

Fixition Magnetic track

Size mm L300*W35mm

Cutout mm cutout

Certificates CE

On request

- different power, CRI, C.C.T..

- other LED Brands, CREE, OSRAM, SAMSUNG, Bridgelux, etc.
- other Drivers, OSRAM, PHILIPS, Meanwell, KEGU, Lifud, etc.
- dimming functions: TRIAC, 0/1-10V, DALI, Mesh, 2.4G
- emergency kit with specific duration.

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Dimensions and specifications subject to alterations without notice.

Add: NO.16 Industrial 2nd Road, Caosan, Guzhen, Zhongshan, Guangdong, China . www.luna-lighting.com Email: sales@luna-lighting.cn Wechat: Luna_lighting

LUNA Mcfion Lighting Factory @ Copyright 2020