

t +86-760-22343190 m +86 173 2816 2503 e sales@luna-lighting.cn www.luna-lighting.com

Recessed Spotlight CRH10-7

The product range uses a same versatile heatsink, made by die-cast aluminum resulting in good cooling effect.

Supporting 10 different face rings, including: arc, straight edge, anti-glare, fixed and adjustable, suitable for different applications.


Reflective cups with 4 different beam angles can be spotlights or downlight.

Optional with different LED beads, as well as drive, TRAIC, 0/1-10V, DALI and other dimming options.

Applications

architectural, commercial, exhibition areas, transit areas, corridors, shops, display windows, service areas, offices, staterooms, schools, halls, households, etc



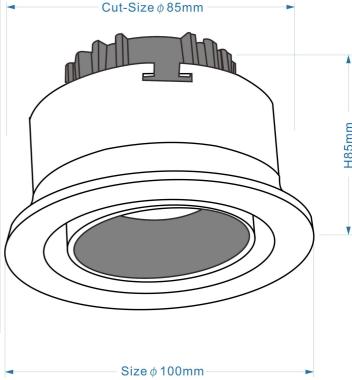

Product model: LN-CRH10-7

Electrical

Power 10W

Input voltage AC220-240V

Frequency 50..60Hz

Driver options OSRAM,PHILIPS,KEGU,LIFUD,Anxiong

Dimming on/off,TRAIC,0/1-10V,DALI,2.4G

Class III SELV

Ambient temperature 0 − 40°C

Relative humidity <85%

LED

LED brand options CREE,OSRAM,PHILIPS

LED Qty 1

LED type COB

C.C.T. **3000K,4000K,6000K**

CRI >80,>90

Lumen maintenance LM80

SDCM 4

Optical

Beam angle ° 15,24,36,60

Luminous flux (LED)* lm 1200

Lumen efficiency (LED)* lm/W 120

Luminous flux (Luminare)* lm 750

Lumen efficiency (Luminare)* Im/W 75

Material

Housing Die-casting aluminum

Optics PMMA

Surface treament Powder coated

Color options Matt White, Matt Black

IP grade IP20

Installation

Location Interior

Fixition Ceiling Recessed

Size mm Ø100*H85mm

Cutout mm Ø85mm

Certificates CE

On request

- different power, CRI, C.C.T..

- other LED Brands, CREE, OSRAM, SAMSUNG, Bridgelux, etc.
- other Drivers, OSRAM, PHILIPS, Meanwell, KEGU, Lifud, etc.
- dimming functions: TRIAC, 0/1-10V, DALI, Mesh, 2.4G
- emergency kit with specific duration.

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Dimensions and specifications subject to alterations without notice.

Add: NO.16 Industrial 2nd Road, Caosan, Guzhen, Zhongshan, Guangdong, China . www.luna-lighting.com Email: sales@luna-lighting.cn Wechat: Luna_lighting

LUNA Mcfion Lighting Factory @ Copyright 2020