



t +86-760-22343190
m +86 173 2816 2503
e sales@luna-lighting.cn
www.luna-lighting.com

Recessed Spotlight CRH10-9

The product range uses a same versatile heatsink, made by die-cast aluminum resulting in good cooling effect.


Supporting 10 different face rings, including: arc, straight edge, anti-glare, fixed and adjustable, suitable for different applications.

Reflective cups with 4 different beam angles can be spotlights or downlight.

Optional with different LED beads, as well as drive, TRAIC, 0/1-10V, DALI and other dimming options.

Applications

architectural, commercial, exhibition areas, transit areas, corridors, shops, display windows, service areas, offices, staterooms, schools, halls, households, etc

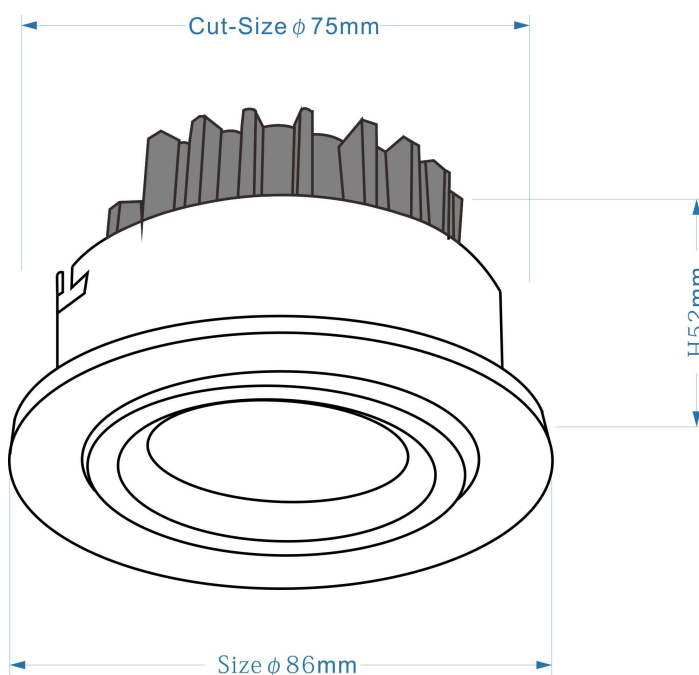

Product model: LN-CRH10-9

Electrical

Power	10W
Input voltage	AC220-240V
Frequency	50..60Hz
Driver options	OSRAM,PHILIPS,KEGU,LIFUD,Anxiong
Dimming	on/off,TRAIC,0/1-10V,DALI,2.4G
Class	III SELV
Ambient temperature	0 - 40°C
Relative humidity	<85%

LED

LED brand options	CREE,OSRAM,PHILIPS
-------------------	---------------------------

LED Qty	1
LED type	COB
C.C.T.	3000K,4000K,6000K
CRI	>80,>90
Lumen maintenance	LM80
SDCM	4

Optical

Beam angle °	15,24,36,60
Luminous flux (LED)* lm	1200
Lumen efficiency (LED)* lm/W	120
Luminous flux (Luminare)* lm	750
Lumen efficiency (Luminare)* lm/W	75

Material

Body & heatsink	Die-casting aluminum
Housing	Die-casting aluminum
Optics	PMMA
Surface treatment	Powder coated
Color options	Matt White
IP grade	IP20

Installation

Location	Interior
Fixition	Ceiling Recessed
Size mm	Ø86*H52mm
Cutout mm	Ø75mm
Certificates	CE

On request

- different power, CRI, C.C.T..
- other LED Brands, CREE, OSRAM, SAMSUNG, Bridgelux, etc.
- other Drivers, OSRAM, PHILIPS, Meanwell, KEGU, Lifud, etc.

- dimming functions: TRIAC, 0/1-10V, DALI, Mesh, 2.4G
- emergency kit with specific duration.

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Dimensions and specifications subject to alterations without notice.

Add: NO.16 Industrial 2nd Road, Caosan, Guzhen, Zhongshan,
Guangdong, China . www.luna-lighting.com Email: sales@luna-lighting.cn Wechat: Luna_lighting

LUNA Mcfion Lighting Factory @ Copyright 2020