www.luna-lighting.cn

LUMU

SERIES

LUMU

POWERFUL RECESSED SPOT

132 combinations in total

4 powers

6 types of rings

trimless or grille

4 Beam angle

6 cup colors

3 anti-glare accessories

fix or swing

square or round

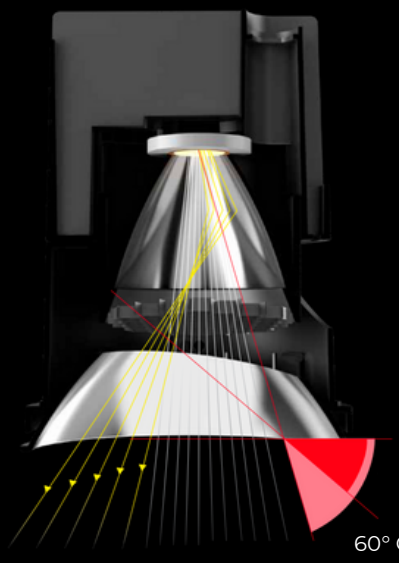

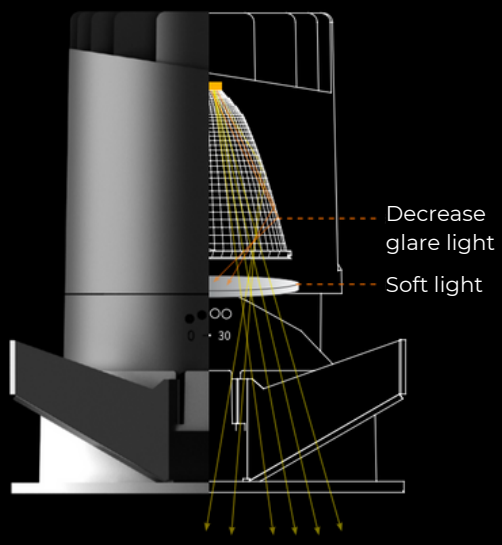



milky stripe grille honeycomb

Optional cup colors:

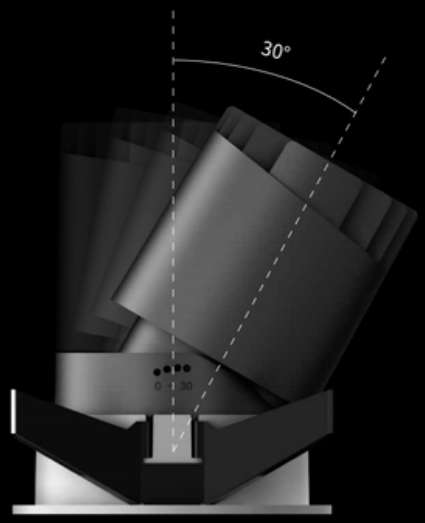

30° adjustable
with locating groove

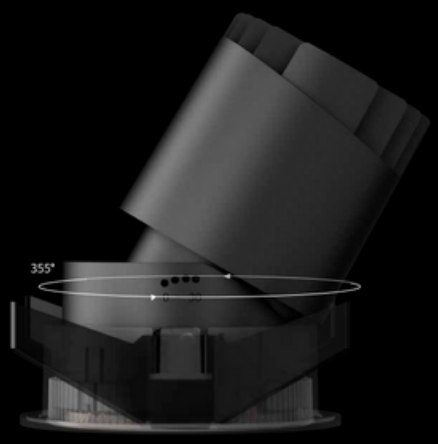

355° adjustable
with locating groove

2-30mm

fits for variety of
thickness

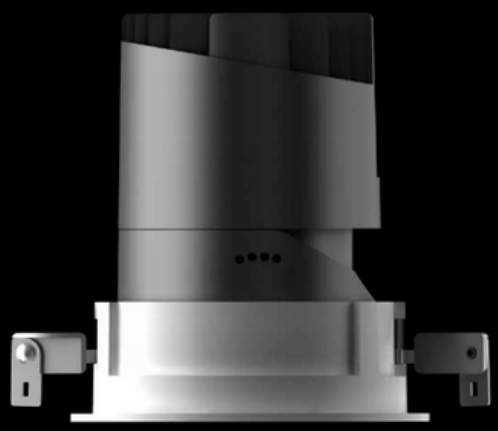



Wide Frame

Flexible combinations

A powerful Family

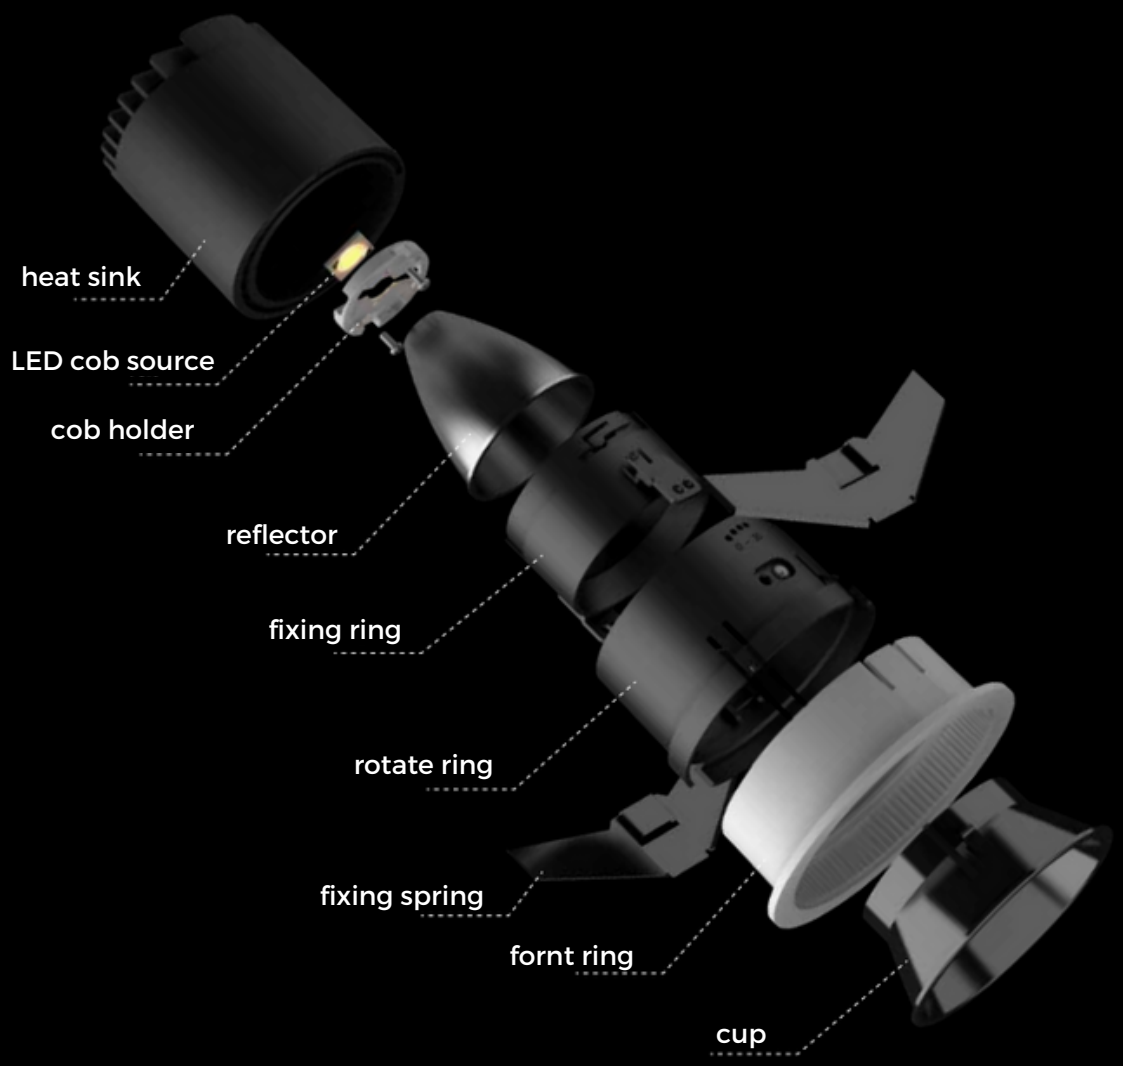

LUMU 6W COMBINATIONS

SQUARE

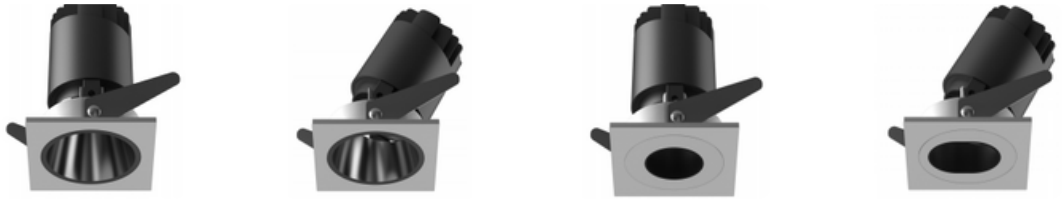

SLIM ROUND

NORMAL ROUND

TRIMLESS ROUND

LUMU 6W COMBINATIONS

WIDE ROUND

WIDE 2 HEADS

WIDE 3 HEADS

WIDE 4 HEADS

LUMU 6W COMBINATIONS

WIDE TRIMLESS

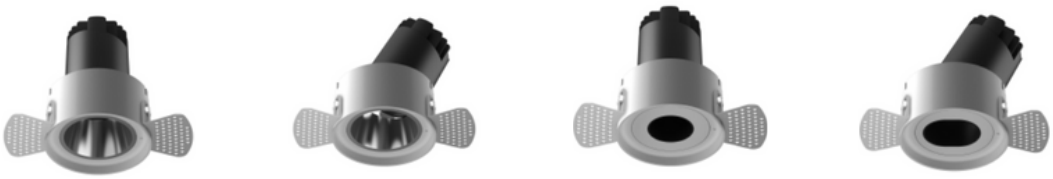

WIDE TRIMLESS 2 HEADS

WIDE TRIMLESS 3 HEADS

WIDE TRIMLESS 4 HEADS

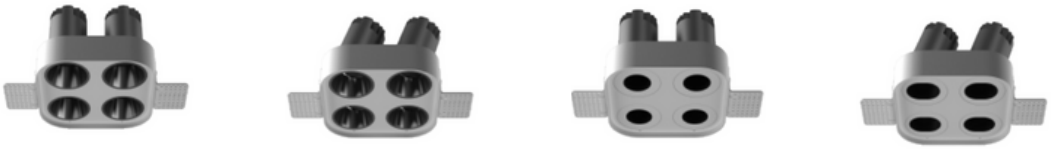

LUMU 12W COMBINATIONS

SQUARE

NEW

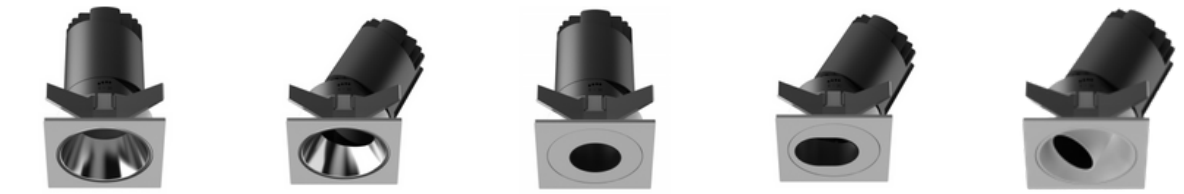

SLIM ROUND

NEW

ROUND 2 HEADS

NEW

TRIMLESS ROUND

NEW

LUMU 12W COMBINATIONS

TRIMLESS 2 HEADS

NEW

WIDE SQUARE

TRIMLESS SQUARE

LUMU 20W COMBINATIONS

SQUARE

NEW

SLIM ROUND

NEW

ROUND 2 HEADS

NEW

TRIMLESS

NEW

TRIMLESS 2 HEADS

NEW

LUMU 30W COMBINATIONS

SQUARE

NEW

ROUND

NEW

ROUND 2 HEADS

NEW

TRIMLESS

NEW

TRIMLESS 2 HEADS

NEW

WIDE ROUND

NEW

LUMU 6W SQUARE



Cutout: Φ50mm

Model: LN-CR-LUMU-6-SQ	Power: 6W	Luminous flux: LED 720lm / Lamp 300lm
Size: L60xW60xH75mm	Cutout: Φ50mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W SLIM ROUND



Cutout: Φ50mm

Model: LN-CR-LUMU-6-SRD	Power: 6W	Luminous flux: LED 720lm / Lamp 300lm
Size: D60mmxH78mm	Cutout: Φ50mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W NORMAL ROUND



Cutout: Φ55-60mm

Model: LN-CR-LUMU-6-NRD	Power: 6W	Luminous flux: LED 720lm / Lamp 300lm
Size: D65mmxH75mm	Cutout: Φ55-60mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W TRIMLESS ROUND



Cutout: Φ52mm

Model: LN-CR-LUMU-6-TRD	Power: 6W	Luminous flux: LED 720lm / Lamp 300lm
Size: D94mmxH75mm	Cutout: Φ52mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W WIDE ROUND



Cutout: Φ70mm

Model: LN-CR-LUMU-6-WRD	Power: 6W	Luminous flux: LED 720lm / Lamp 300lm
Size: D80mmxH81mm	Cutout: Φ70mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W WIDE ROUND 2 HEADS



Cutout: 130xΦ68mm

Model: LN-CR-LUMU-6-WRD-2	Power: 6Wx2	Luminous flux: LED 720lm x2 / Lamp 300lm x2
Size: L140mmxW80xH81mm	Cutout: Φ130x70mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W WIDE ROUND 3 HEADS



Cutout: 190xΦ68mm

Model: LN-CR-LUMU-6-WRD-3	Power: 6W x3	Luminous flux: LED 720lm x3 / Lamp 300lm x3
Size: L200mmxW80mmxH81mm	Cutout: Φ55-60mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W WIDE ROUND 4 HEADS



Cutout: 130x130mm

Model: LN-CR-LUMU-6-WRD-4	Power: 6W x4	Luminous flux: LED 720lm x4 / Lamp 300lm x4
Size: L140mmxW140mmxH84mm	Cutout: 130mmx130mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W TRIMLESS WIDE ROUND



Cutout: Φ70mm

Model: LN-CR-LUMU-6-TWRD	Power: 6W	Luminous flux: LED 720lm / Lamp 300lm
Size: D126mmxH81mm	Cutout: Φ70mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W TRIMLESS WIDE ROUND 2 HEADS



Cutout: 128xΦ68mm

Model: LN-CR-LUMU-6-TWRD-2	Power: 6Wx2	Luminous flux: LED 720lm x2 / Lamp 300lm x2
Size: L140mmxW80xH81mm	Cutout: Φ130x70mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W TRIMLESS WIDE ROUND 3 HEADS

Cutout: 188xΦ68mm

Model: LN-CR-LUMU-6-TWRD-3	Power: 6W x3	Luminous flux: LED 720lm x3 / Lamp 300lm x3
Size: L200mmxW80mmxH81mm	Cutout: Φ55-60mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 6W TRIMLESS WIDE ROUND 4 HEADS



Cutout: 130x130mm

Model: LN-CR-LUMU-6-TWRD-4	Power: 6W x4	Luminous flux: LED 720lm x4 / Lamp 300lm x4
Size: L140mmxW140mmxH84mm	Cutout: 130mmx130mm	Beam angle: 10°/15°/24°/38°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING | ROUND CUT | OVAL CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | COB

LUMU 12W SQUARE



Cutout: Φ75mm

Model: LN-CR-LUMU-12-SQ	Power: 12W	Luminous flux: LED 1350lm / Lamp 900lm
Size: L86xW86xH104mm	Cutout: Φ75mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W SLIM ROUND



Cutout: Φ75mm

Model: LN-CR-LUMU-12-SRD	Power: 12W	Luminous flux: LED 1350lm / Lamp 900lm
Size: D86mmxH99mm	Cutout: Φ75mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W ROUND 2 HEADS



Cutout: 182xΦ94mm

Model: LN-CR-LUMU-12-RD-2	Power: 12W x2	Luminous flux: LED 1350lm x2 / Lamp 900lm x2
Size: L195mmxW104mmxH109mm	Cutout: 182xΦ94mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W TRIMLESS ROUND



Cutout: Φ75mm

Model: LN-CR-LUMU-12-TRD	Power: 12W	Luminous flux: LED 1350lm / Lamp 900lm
Size: D127mmxH104mm	Cutout: Φ75mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W TRIMLESS ROUND 2 HEADS



Cutout: 180xΦ92mm

Model: LN-CR-LUMU-12-TRD-2	Power: 12W x2	Luminous flux: LED 1350lm x2 / Lamp 900lm x2
Size: L246xW89xH109mm	Cutout: L182xΦ92mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W WIDE SQUARE



Cutout: 82x82mm

Model: LN-CR-LUMU-12-WSQ	Power: 12W	Luminous flux: LED 1350lm / Lamp 900lm
Size: L89mmxW89mmxH110mm	Cutout: 82x82mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SQUARE CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W WIDE SQUARE 2 HEADS



Cutout: 163x80mm

Model: LN-CR-LUMU-12-WSQ-2	Power: 12W x2	Luminous flux: LED 1350lm x2 / Lamp 900lm x2
Size: L172mmxW89mmxH120mm	Cutout: 163x82mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SQUARE CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W TRIMLESS SQUARE



Cutout: 82x82mm

Model: LN-CR-LUMU-12-TSQ	Power: 12W	Luminous flux: LED 1350lm / Lamp 900lm
Size: L134mmxW89mmxH120mm	Cutout: 82x82mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SQUARE CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° | 15° | 24° | 38° | 50° | COB

LUMU 12W TRIMLESS SQUARE 2 HEADS



Cutout: 163x80mm

Model: LN-CR-LUMU-12-TSQ-2	Power: 12W x2	Luminous flux: LED 1350lm x2 / Lamp 900lm x2
Size: L227mmxW82mmxH115mm	Cutout: 163x82mm	Beam angle: 10°/15°/24°/38°/50°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX SQUARE CUT

0/1-10V | DALI | IP20 | Opti Beam | High CRI

10° 15° 24° 38° 50° COB

LUMU 20W SQUARE



Cutout: Φ95mm

Model: LN-CR-LUMU-20-SQ	Power: 20W	Luminous flux: LED 2300lm / Lamp 1600lm
Size: L106xW106xH119mm	Cutout: Φ95mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX SWING 30° ROUND CUT OVAL CUT SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

LUMU 20W SLIM ROUND



Cutout: Φ95mm

Model: LN-CR-LUMU-20-SRD	Power: 20W	Luminous flux: LED 2300lm / Lamp 1600lm
Size: L106xW106xH119mm	Cutout: Φ95mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX SWING 30° ROUND CUT OVAL CUT SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

LUMU 20W ROUND 2 HEADS



Cutout: L225xΦ115mm

Model: LN-CR-LUMU-20-RD-2	Power: 20W x2	Luminous flux: LED 2300lm x2 / Lamp 1600lm x2
Size: L240xD128xH131mm	Cutout: L225 x Φ115mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX SWING 30° ROUND CUT OVAL CUT SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

LUMU 20W TRIMLESS ROUND



Cutout: Φ95mm

Model: LN-CR-LUMU-20-TRD	Power: 20W	Luminous flux: LED 2300lm / Lamp 1600lm
Size: L162xD95xH126mm	Cutout: Φ95mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° | 15° | 24° | 38° | 55° | COB

LUMU 20W ROUND 2 HEADS



Cutout: L225xΦ115mm

Model: LN-CR-LUMU-20-TRD-2	Power: 20W x2	Luminous flux: LED 2300lm x2 / Lamp 1600lm x2
Size: L224xW165xH131mm	Cutout: L225 x Φ115mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | ROUND CUT | OVAL CUT | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° | 15° | 24° | 38° | 55° | COB

LUMU 30W SQUARE



Cutout: Φ120mm

Model: LN-CR-LUMU-30-SQ	Power: 30W	Luminous flux: LED 3300lm / Lamp 2350lm
Size: L133xW133xH155mm	Cutout: Φ120mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° | 15° | 24° | 38° | 55° | COB

LUMU 30W ROUND



Cutout: Φ120mm

Model: LN-CR-LUMU-30-RD	Power: 30W	Luminous flux: LED 3300lm / Lamp 2350lm
Size: D132xH155mm	Cutout: Φ120mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX | SWING 30° | SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° | 15° | 24° | 38° | 55° | COB

LUMU 30W ROUND 2 HEADS



Cutout: L280x Φ140mm

Model: LN-CR-LUMU-30-RD-2	Power: 30W x2	Luminous flux: LED 3300lm x2 / Lamp 2350lm x2
Size: L296xΦ167xH161mm	Cutout: L280xΦ140mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX

SWING 30°

SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

LUMU 30W TRIMLESS ROUND



Cutout: Φ120mm

Model: LN-CR-LUMU-30-TRD	Power: 30W	Luminous flux: LED 3300lm / Lamp 2350lm
Size: L185xΦ120xH150mm	Cutout: Φ120mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX

SWING 30°

SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

LUMU 30W TRIMLESS ROUND 2 HEADS



Cutout: L280x Φ140mm

Model: LN-CR-LUMU-30-TRD-2	Power: 30W x2	Luminous flux: LED 3300lm x2 / Lamp 2350lm x2
Size: L278xW195xH161mm	Cutout: L280xΦ140mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX

SWING 30°

SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

LUMU 30W WIDE ROUND



Cutout: Φ150mm

Model: LN-CR-LUMU-30-WRD	Power: 30W	Luminous flux: LED 3300lm / Lamp 2350lm
Size: Φ162xH158mm	Cutout: Φ150mm	Beam angle: 12°/15°/24°/38°/55°
LED Chips: COB CREE/ OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Cup color: sanded black, sanded white, sanded silver, sanded gold, mirror, shinning black		

Anti-glare accessories: Milky lens, honeycomb

FIX

SWING 30°

SWING-2 30°

0/1-10V | DALI | IP20 | Opti Beam | High CRI

12° 15° 24° 38° 55° COB

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25℃ indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Installation Instructions

LUMU Spotlight Installing Instructions

For cutout Φ50mm, Φ75mm

1 Cut a specific hole in surface, with thickness of 3-20mm.

2 Gently separate the lamp into three parts by small screwdriver.



3 Press the spring and insert the front ring into surface



4 Connect driver into electricity



5 Place the driver inside the surface.



6 Fix the lamp body into the frame, make sure the clips are well installed.

7 Fix the cup into the lamp body with locating point.



8 Turn on power to test.



LUMU Spotlight Installing Instructions

For cutout Φ95mm, Φ120mm

1 Cut a specific hole in surface, with thickness of 3-20mm.

2 Gently separate the lamp into three parts by small screwdriver.



3 Press the supporting legs and insert the front ring into surface



4 using screw driver to turn the supporting legs to fix the surface.



5 Connect driver into electricity



6 Place the driver inside the surface.

7 Fix the lamp body into the frame, make sure the clips are well installed.

8 Fix the cup into the lamp body with locating point.

9 Turn on power to test.

LUMU Trimless Spotlight Installing Instructions

1 Cut a specific hole in surface, with thickness of 3-20mm.

2 Gently separate the lamp into three parts by small screwdriver.



3 Adjust the frame's wings to fit the trim same as surface.



4 Put the frame's wings inside the surface.

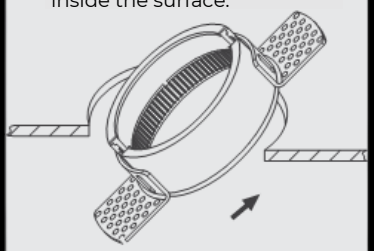

5 Fix the frame with glue or by screws.



6 Paint the edges or holes between surface and frame.

7 Turn off the power.



8 Connect the lamp and drivers with cables.



9 Fix the lamp body into the frame, make sure the clips are well installed.

10 Fix the driver & lamp body with provide instructions.

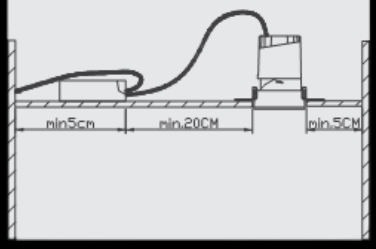

11 Fix the cup into the lamp body with locating point.



12 Turn on power to test.



For more information, please check our website link:

https://www.luna-lighting.cn

For more information, or contact with us by:

Wechat/WhatsApp: +86-17328162503

WhatsApp:+86-18928117650

email: sales@luna-lighting.cn

website: www.luna-lighting.cn

Follow us on: