


Recessed Linear Spotlight



2021


Applications

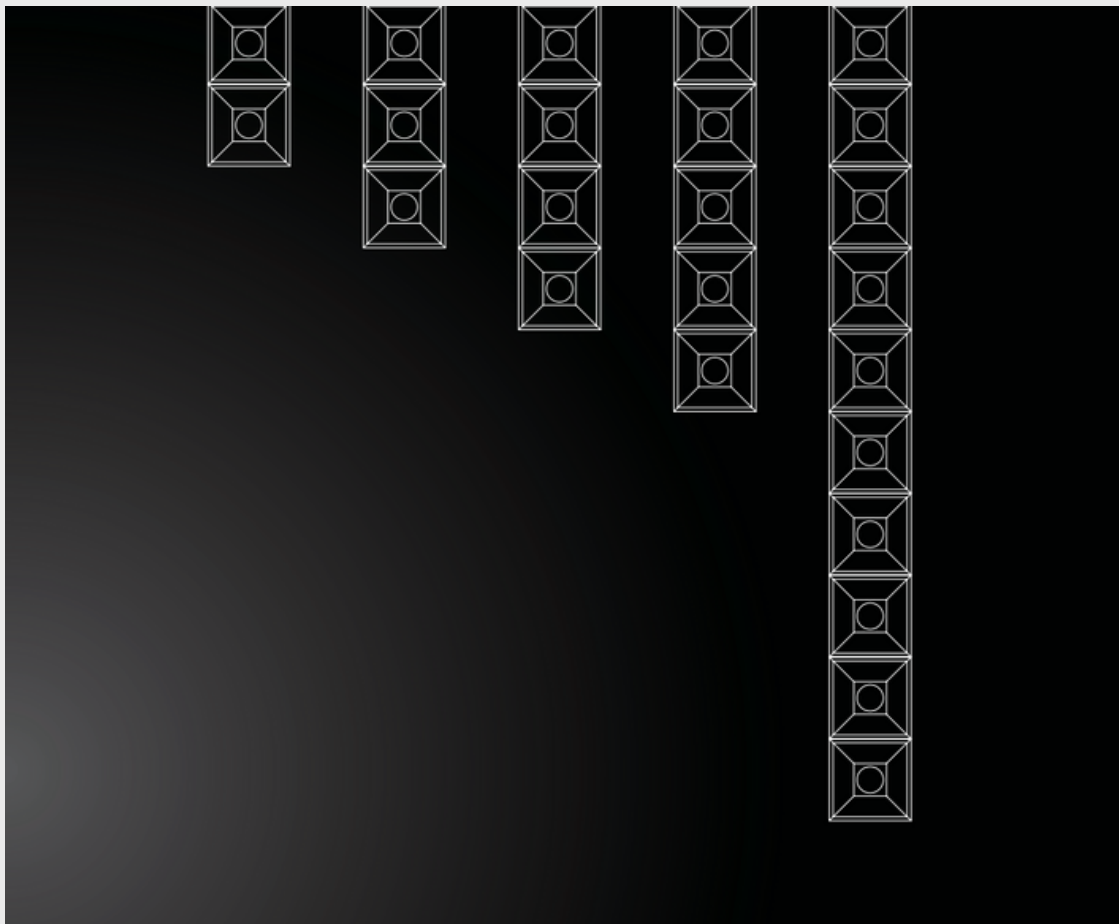

MINI Recessed Linear Spotlight




2 LED | 3W



3 LED | 5W



4 LED | 7W



6 LED | 10W



9 LED | 12W



12 LED | 20W




2 LED | 3W




3 LED | 5W




4 LED | 7W



6 LED | 10W



9 LED | 12W




12 LED | 20W




MINI Recessed Linear Spot

Mini Recessed Linear Spot 2 Cells




Cutout: L48xW27.5mm

Model: LN-CROLINE-S2	Power: 3W	Luminous flux: LED 435lm / Lamp 350lm
Size: L52xW32xH40mm	Cutout: L48xW27.5mm	Beam angle: 30°/30°x30°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	







Mini Recessed Linear Spot 3 Cells




Cutout: L57xW27.5mm

Model: LN-CROLINE-S3	Power: 5W	Luminous flux: LED 645lm / Lamp 420lm
Size: L62xW32xH40mm	Cutout: L57xW27.5mm	Beam angle: 30°/30°x30°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	







Mini Recessed Linear Spot 4 Cells




Cutout: L48xW48mm

Model: LN-CROLINE-S4	Power: 7W	Luminous flux: LED 870lm / Lamp 560lm
Size: L52xW52xH40mm	Cutout: L48xW48mm	Beam angle: 30°/30°x30°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	







Mini Recessed Linear Spot 6 Cells



Cutout: L57xW27.5mm


Model: LN-CROLINE-S6	Power: 10W	Luminous flux: LED 1100lm / Lamp 830lm
Size: L109xW32xH40mm	Cutout: L104xW27.5mm	Beam angle: 30°/30°x30°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



MINI Recessed Linear Spot




Mini Recessed Linear Spot 9 Cells




Cutout: L68xW68mm


Model: LN-CROLINE-S9	Power: 12W	Luminous flux: LED 1300lm / Lamp 900lm
Size: L71xW71xH40mm	Cutout: L68xW68mm	Beam angle: 30°/30°x30°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



9 LED | 12W




Mini Recessed Linear Spot 12 Cells




Cutout: L200xW27.5mm

Model: LN-CROLINE-S12	Power: 18W	Luminous flux: LED 1900lm / Lamp 850lm
Size: L205xW32xH40mm	Cutout: L200xW27.5mm	Beam angle: 30°/30°x30°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



12 LED | 18W



*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Medium Recessed Linear Spot





Medium Recessed Linear Spot 1 Cell




Cutout: L37xW37mm


Model: LN-CROLINE-M1	Power: 2W	Luminous flux: LED 220lm / Lamp 150lm
Size: L45xW45xH49mm	Cutout: L37xW37mm	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



1 LED | 2W




Medium Recessed Linear Spot 2 Cells



Cutout: L68xW37mm


Model: LN-CROLINE-M2	Power: 4W	Luminous flux: LED 440lm / Lamp 300lm
Size: L75xW45xH49mm	Cutout: L68xW37mm	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



2 LED | 4W




Medium Recessed Linear Spot 5 Cells



Cutout: L140xW37mm

Model: LN-CROLINE-M5	Power: 10W	Luminous flux: LED 1150lm / Lamp 750lm
Size: L147xW45xH49mm	Cutout: L140xW37mm	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	




5 LED | 10W





Medium Recessed Linear Spot



Medium Recessed Linear Spot 10 Cells




Model: LN-CROLINE-M10	Power: 20W	Luminous flux: LED 2300lm / Lamp 1500lm
Size: L280xW45xH49mm	Cutout: L273xW37mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	




Cutout: L273xW37mm

Medium Recessed Linear Spot 15 Cells



Model: LN-CROLINE-M15	Power: 30W	Luminous flux: LED 3450lm / Lamp 2250lm
Size: L413xW45xH49mm	Cutout: L405xW37mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Cutout: L405xW37mm

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.


Trimless Recessed Linear Spot




Trimless Recessed Linear Spot 1 Cell





Model: LN-CROLINE-F-M1	Power: 2W	Luminous flux: LED 220lm / Lamp 150lm
Size: L72xW41xH49mm	Cutout: L42xW41mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

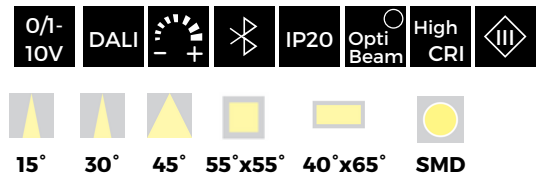


Trimless Recessed Linear Spot 2 Cells




Model: LN-CROLINE-F-M2	Power: 4W	Luminous flux: LED 440lm / Lamp 300lm
Size: L71xW72xH49mm	Cutout: L72xW41mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

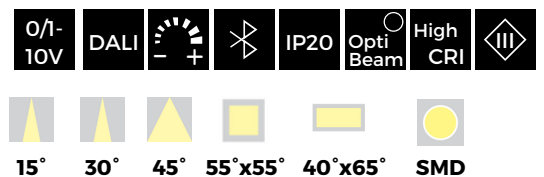

Trimless Recessed Linear Spot 5 Cells




Model: LN-CROLINE-F-M5	Power: 10W	Luminous flux: LED 1150lm / Lamp 750lm
Size: L143xW72xH49mm	Cutout: L144xW41mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

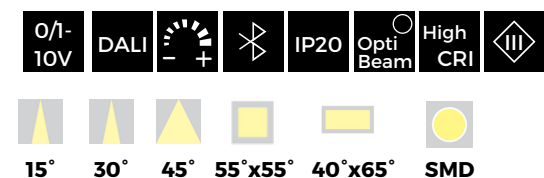

Trimless Recessed Linear Spot




Trimless Recessed Linear Spot 10 Cells




Model: LN-CROLINE-F-M10	Power: 20W	Luminous flux: LED 2300lm / Lamp 1500lm
Size: L276xW72xH49mm	Cutout: L277xW41mm	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Cutout: L277xW41mm




Medium Recessed Linear Spot 15 Cells



Model: LN-CROLINE-F-M15	Power: 30W	Luminous flux: LED 3450lm / Lamp 2250lm
Size: L409xW72xH49mm	Cutout: L410xW41mm	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Cutout: L410xW41mm



*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Wall Washer Recessed Linear




Wall Washer Recessed Linear Spot 5 Cells



Cutout: L140xW37mm

Model: LN-CROLINE-P-M5	Power: 10W	Luminous flux: LED 1150lm / Lamp 700lm
Size: L147xW45xH54mm	Cutout: L140xW37mm	Beam angle: wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	




Wall Washer SMD

Wall Washer Recessed Linear Spot 10 Cells




Cutout: L273xW37mm

Model: LN-CROLINE-P-M10	Power: 20W	Luminous flux: LED 2300lm / Lamp 1300lm
Size: L280xW45xH54mm	Cutout: L273xW37mm	Beam angle: wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	




Wall Washer SMD

Wall Washer Recessed Linear Spot 15 Cells



Cutout: L405xW37mm

Model: LN-CROLINE-P-M15	Power: 30W	Luminous flux: LED 3300lm / Lamp 2000lm
Size: L413xW45xH54mm	Cutout: L405xW37mm	Beam angle: wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Wall Washer SMD

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Grille Recessed Linear Spot



Grille Recessed Linear Spot 10 Cells

Model: LN-CGOLINE-M10	Power: 20W	Luminous flux: LED 2300lm / Lamp 1500lm
Size: L311xW104xH96mm	Cutout: L295xW90mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum, metal frame Housing Colors: White, Lens: Black;		

Cutout: L295xW90mm

10 LED 1 20W

0/1-10V	DALI			IP20	Opti Beam	High CRI	
15°	30°	45°	55°x55°	40°x65°	SMD		

Grille Recessed Linear Spot 15 Cells

Model: LN-CGOLINE-M15	Power: 30W	Luminous flux: LED 3400lm / Lamp 2200lm
Size: L444xW104xH96mm	Cutout: L425xW90mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum, metal frame Housing Colors: White, Lens: Black;		

Cutout: L425xW90mm

15 LED 1 30W

0/1-10V	DALI			IP20	Opti Beam	High CRI	
15°	30°	45°	55°x55°	40°x65°	SMD		

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Grille Recessed Linear Spot



Grille Recessed Linear Spot 10 Cells 2 HEADS




Model: LN-CGOLINE-M10-2	Power: 20W x2	Luminous flux: LED 2300lm x2 / Lamp 1500lm x2
Size: L311xW159xH96mm	Cutout: L295xW145mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum, metal frame Housing Colors: White, Lens: Black;		

Cutout: L295xW145mm




0/1-10V	DALI	Beam Angle Icon	IP20	Opti Beam	High CRI	III
15°	30°	45°	55°x55°	40°x65°	SMD	

Grille Recessed Linear Spot 15 Cells 2 HEADS



Model: LN-CGOLINE-M15-2	Power: 30W x2	Luminous flux: LED 3400lm x2 / Lamp 2200lm x2
Size: L444xW159xH96mm	Cutout: L425xW145mm	Beam angle: 15°/30°/45°/55°x55°/45°x65°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum, metal frame Housing Colors: White, Lens: Black;		

Cutout: L425xW145mm



0/1-10V	DALI	Beam Angle Icon	IP20	Opti Beam	High CRI	III
15°	30°	45°	55°x55°	40°x65°	SMD	

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.


Surface Mounted Linear Spot



Surface Mounted Linear Spot 5 Cells





Model: LN-CCOLINE-M5	Power: 10W	Luminous flux: LED 1150lm / Lamp 700lm
Size: L137xW34xH70mm	Cutout: N/A	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. LIFUD/KEGU/ANXIONG	
Materials: Aluminum	Housing Colors: Black, Lens: Black;	




Surface Mounted Linear Spot 10 Cells





Model: LN-CCOLINE-M10	Power: 20W	Luminous flux: LED 2300lm / Lamp 1300lm
Size: L270xW34xH70mm	Cutout: N/A	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. LIFUD/KEGU/ANXIONG	
Materials: Aluminum	Housing Colors: Black, Lens: Black;	



Surface Mounted Linear Spot 15 Cells



Model: LN-CCOLINE-M15	Power: 30W	Luminous flux: LED 3400lm / Lamp 2200lm
Size: L402xW34xH70mm	Cutout: N/A	Beam angle: 15°/30°/45°/55°x55°/45x65°
LED Chips: SMD OSRAM	Driver: C.C. LIFUD/KEGU/ANXIONG	
Materials: Aluminum	Housing Colors: Black, Lens: Black;	






*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Curve Medium Recessed Linear Spot



Curve Medium Recessed Linear Spot

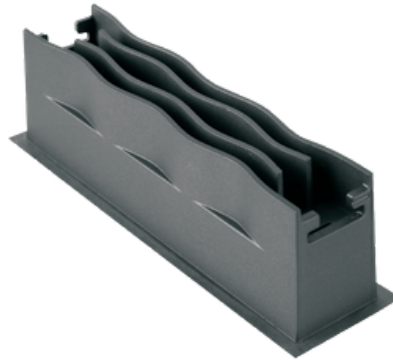

Curve Medium Recessed Linear Spot 1 Cell

Cutout: L40xW40mm

Model: LN-CROLINE-CM1	Power: 2W	Luminous flux: LED 220lm / Lamp 150lm
Size: L45.5xW45.5xH50mm	Cutout: L40xW40mm	Beam angle: 12°/20°/34°/40°/48°/55°x55°/40°x65°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

50
45.5
40*40

12° 20° 34° 48° 55°x55° 40°x65° 60° 40° Wall Washer

Curve Medium Recessed Linear Spot 3 Cells

Cutout: L100xW40mm

Model: LN-CROLINE-CM3	Power: 6W	Luminous flux: LED 600lm / Lamp 400lm
Size: L106xW45.5xH50mm	Cutout: L100xW40mm	Beam angle: 12°/20°/34°/40°/48°/55°x55°/40°x65°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

50
45.5
100*40

12° 20° 34° 48° 55°x55° 40°x65° 60° 40° Wall Washer

Curve Medium Recessed Linear Spot 4 Cells

Cutout: L70xW70mm

Model: LN-CROLINE-CM4	Power: 10W	Luminous flux: LED 1100lm / Lamp 750lm
Size: L76xW76xH50mm	Cutout: L70xW70mm	Beam angle: 12°/20°/34°/40°/48°/55°x55°/40°x65°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

50
45.5
70*70

12° 20° 34° 48° 55°x55° 40°x65° 60° 40° Wall Washer


*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.




Curve Medium Recessed Linear Spot

Curve Medium Recessed Linear Spot 5 Cells




Cutout: L160xW40mm

Model: LN-CROLINE-CM5	Power: 12W	Luminous flux: LED 1320lm / Lamp 900lm
Size: L165.5xW45.5xH50mm	Cutout: L160xW40mm	Beam angle: 12°/20°/34°/40°/48°/55°x55°/40x65°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

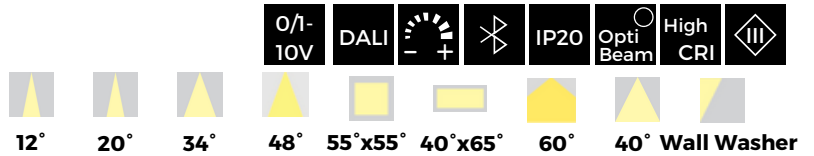




Curve Medium Recessed Linear Spot 9 Cells




Cutout: L100xW100mm

Model: LN-CROLINE-CM9	Power: 18W	Luminous flux: LED 1920lm / Lamp 1350lm
Size: L106xW106xH50mm	Cutout: L100xW100mm	Beam angle: 12°/20°/34°/40°/48°/55°x55°/40x65°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

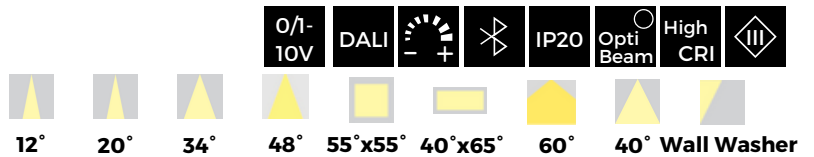




Curve Medium Recessed Linear Spot 10 Cells



Cutout: L310xW40mm

Model: LN-CROLINE-CM10	Power: 24W	Luminous flux: LED 2600lm / Lamp 1800lm
Size: L316xW45.5xH50mm	Cutout: L310xW40mm	Beam angle: 12°/20°/34°/40°/48°/55°x55°/40x65°/60°
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

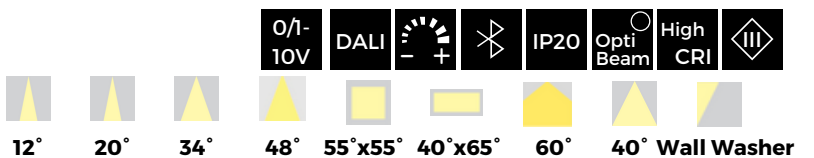

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Large Recessed Linear Spot




24°x77°



38°x77°



Wall Washer



12°




23°



38°




50°






Large Recessed Linear Spot

Large Recessed Linear Spot 1 Cell




Cutout: L49xW49mm

Model: LN-CROLINE-L1	Power: 5W	Luminous flux: LED 450lm / Lamp 350lm
Size: L55xW55xH50mm	Cutout: L49xW49mm	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

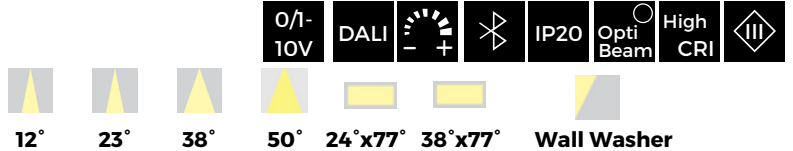



Large Recessed Linear Spot 3 Cells




Cutout: L125xW49mm

Model: LN-CROLINE-L3	Power: 12W	Luminous flux: LED 1200lm / Lamp 840lm
Size: L131xW55xH50mm	Cutout: L125xW49mm	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	


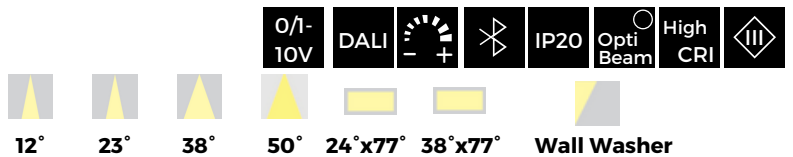



Large Recessed Linear Spot 4 Cells



Cutout: L87xW87mm

Model: LN-CROLINE-L4	Power: 15W	Luminous flux: LED 1550lm / Lamp 1100lm
Size: L93xW93xH50mm	Cutout: L87xW87mm	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

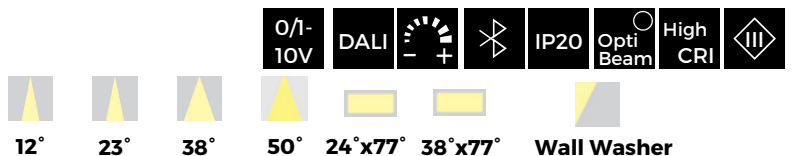


*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.


Large Recessed Linear Spot

Large Recessed Linear Spot 5 Cells




Model: LN-CROLINE-L5	Power: 20W	Luminous flux: LED 2150lm / Lamp 1400lm
Size: L207xW55xH50mm	Cutout: L210xW49mm	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

Cutout: L210xW49mm



Large Recessed Linear Spot 9 Cells



Model: LN-CROLINE-L9	Power: 30W	Luminous flux: LED 3300lm / Lamp 2100lm
Size: L131xW131xH50mm	Cutout: L125xW125mm	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

Cutout: L125xW125mm




Large Recessed Linear Spot 10 Cells



Model: LN-CROLINE-L10	Power: 35W	Luminous flux: LED 3950lm / Lamp 2500lm
Size: L397xW55xH50mm	Cutout: L390xW49mm	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

Cutout: L390xW49mm






*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Large Surface Mounted Linear Spot



Large Surface Mounted Linear Spot

Large Surface Mounted Linear Spot 4 Cells

Model: LN-CROLINE-L5	Power: 15W	Luminous flux: LED 1550lm / Lamp 1050lm
Size: L81.7xW81.7xH80mm	Cutout: N/A	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

0/1-10V

DALI

- +

✕

IP20

Opti Beam

High CRI

III

Large Surface Mounted Linear Spot 9 Cells

Model: LN-CROLINE-L9	Power: 30W	Luminous flux: LED 3300lm / Lamp 2100lm
Size: L119.6xW119.6xH90mm	Cutout: N/A	Beam angle: 12°/23°/38°/50°/27°x77°/38°x77°/Wall washer
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

0/1-10V

DALI

- +

✕

IP20

Opti Beam

High CRI

III

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

Extra Large Recessed Linear Spot





Extra Large Recessed Linear Spot 1 Cell




Cutout: L80xW80mm

Model: LN-CROLINE-XL1	Power: 10W	Luminous flux: LED 1100lm / Lamp 750lm
Size: L97xW97xH86mm	Cutout: L80xW80mm	Beam angle: 15°/30°/45°
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black	

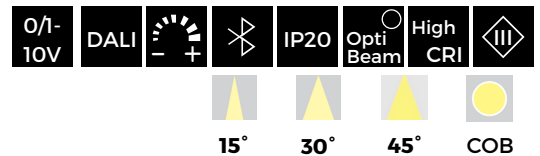



Extra Large Recessed Linear Spot 2 Cells




Cutout: L140xW80mm

Model: LN-CROLINE-XL2	Power: 20W	Luminous flux: LED 2200lm / Lamp 1500lm
Size: L166xW97xH86mm	Cutout: L140xW80mm	Beam angle: 15°/30°/45°
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

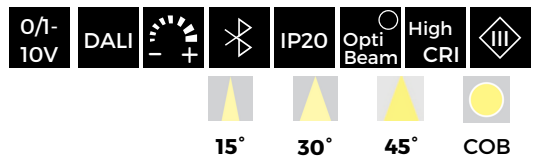



Extra Large Recessed Linear Spot 3 Cells



Cutout: L70xW70mm

Model: LN-CROLINE-XL3	Power: 30W	Luminous flux: LED 3300lm / Lamp 2250lm
Size: L236xW97xH86mm	Cutout: L218xW80mm	Beam angle: 15°/30°/45°
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: silver, mirror;	

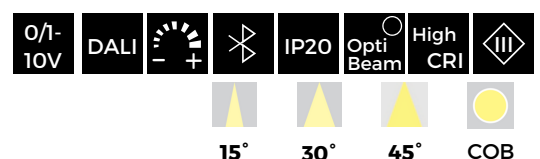

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

NEW



MINI Recessed / Surface Mounted Linear Spot




NEW


MINI Surface Mounted Linear Spot




Mini Surface Mounted Linear Spot 4 Cells




Model: LN-CCOLINE-S4	Power: 5W	Luminous flux: LED 450lm / Lamp 320lm
Size: L62xW62xH62mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors




Mini Surface Mounted Linear Spot 9 Cells




Model: LN-CCOLINE-S9	Power: 10W	Luminous flux: LED 1100lm / Lamp 750lm
Size: L81xW81xH81mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors




Mini Surface Mounted Linear Spot 16 Cells




Model: LN-CCOLINE-S16	Power: 16W	Luminous flux: LED 1650lm / Lamp 1120lm
Size: L100xW100xH70mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors




Mini Surface Mounted Linear Spot 25 Cells



Model: LN-CCOLINE-S25	Power: 25W	Luminous flux: LED 2750lm / Lamp 1800lm
Size: L119xW119xH75mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors



*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.


NEW

MINI Surface Mounted Linear Spot Black Hole

Mini Surface Mounted Linear Spot Black Hole 4 Cells



Model: LN-CCOLINE-S4-BH	Power: 5W	Luminous flux: LED 450lm / Lamp 320lm
Size: L62xW62xH62mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors

- Matt Black
- White
- Rose Gold
- Silver

0/1-10V

DALI

IP20

Opti Beam

High CRI


15°

24°

38°

SMD

Mini Surface Mounted Linear Spot Black Hole 9 Cells



Model: LN-CCOLINE-S9-BH	Power: 10W	Luminous flux: LED 1100lm / Lamp 750lm
Size: L81xW81xH68mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors

- Matt Black
- White
- Rose Gold
- Silver

0/1-10V

DALI

IP20

Opti Beam

High CRI


15°

24°


38°

SMD

Mini Surface Mounted Linear Spot Black Hole 16 Cells



Model: LN-CCOLINE-S16-BH	Power: 16W	Luminous flux: LED 1650lm / Lamp 1120lm
Size: L100xW100xH70mm	Cutout: N/A	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors

- Matt Black
- White
- Rose Gold
- Silver

0/1-10V

DALI

IP20

Opti Beam

High CRI

15°

24°

38°

SMD

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.


*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

NEW

MINI Recessed Linear Spot Black Hole

Mini Recessed Linear Spot Black Hole 4 Cells



Cutout: $\Phi 70\text{mm}$


Model: LN-CROLINE-S4-BH	Power: 5W	Luminous flux: LED 450lm / Lamp 320lm
Size: D80xH35mm	Cutout: $\Phi 70\text{mm}$	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	




Optional baffle colors

- Matt Black
- White
- Rose Gold
- Silver

- 0/1-10V
- DALI
- Dimmer
- IP20
- Opti Beam
- High CRI
- III



Mini Recessed Linear Spot Black Hole 9 Cells



Cutout: $\Phi 100\text{mm}$


Model: LN-CROLINE-S9-BH	Power: 10W	Luminous flux: LED 1100lm / Lamp 750lm
Size: D110xH35mm	Cutout: $\Phi 100\text{mm}$	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	




Optional baffle colors

- Matt Black
- White
- Rose Gold
- Silver

- 0/1-10V
- DALI
- Dimmer
- IP20
- Opti Beam
- High CRI
- III




Mini Recessed Linear Spot Black Hole 16 Cells



Cutout: $\Phi 130\text{mm}$


Model: LN-CROLINE-S16-BH	Power: 16W	Luminous flux: LED 1650lm / Lamp 1120lm
Size: D140xH35mm	Cutout: $\Phi 130\text{mm}$	Beam angle: 15°/24°/38° UGR<17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	



Optional baffle colors

- Matt Black
- White
- Rose Gold
- Silver

- 0/1-10V
- DALI
- Dimmer
- IP20
- Opti Beam
- High CRI
- III



*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.



For more information, please check our website link:

<https://www.luna-lighting.cn>

For more information, or contact with us by:

Wechat/WhatsApp: +86-17328162503

WhatsApp:+86-18928117650

email: sales@luna-lighting.cn

website: www.luna-lighting.cn



Follow us on:

