


MINI SPOT

Light

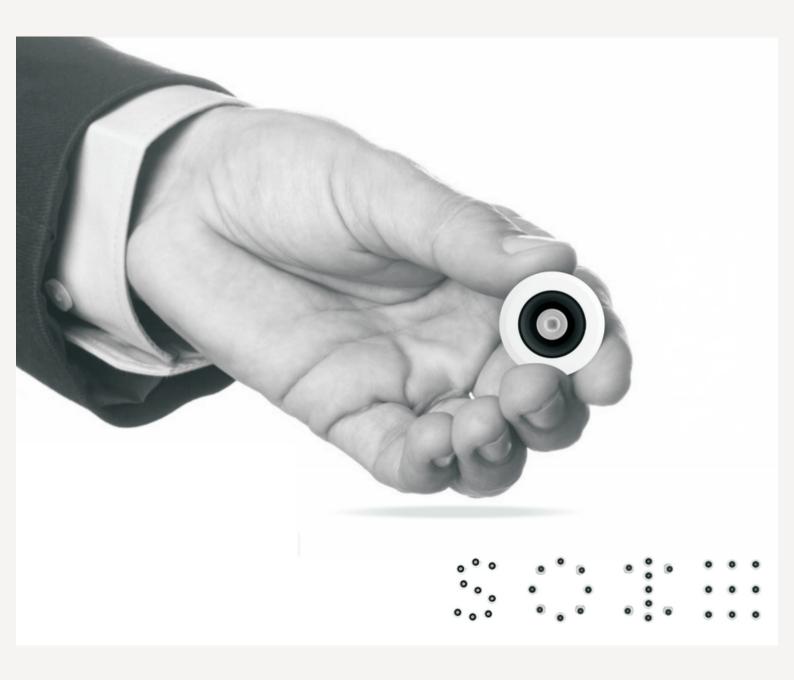

Technical characteristics

Chip




LN-CRO-MINI-25

Power: 2W


Luminous Flux: LED 240lm / Lamp 150lm

Size: D30mm, H24mm Cutout: Ф26mm











LN-CRO-MINI-35


Power: 4W

Luminous Flux: LED450lm / Lamp 300lm

Chip

Size: D40mm, H30.8mm

Cutout: Ф35mm










LN-CRO-MINI-50

Power: 5W

Luminous Flux: LED 500lm / Lamp 350lm

Size: D55mm, H51.4mm Cutout: Ф50mm










LN-CRO-MINI-60


Power: 8W

Luminous Flux: LED 950lm/Lamp 650lm

Size: D65mm, H61.7mm

Cutout: Ф60mm








LN-CRO-MINI-70

Power: 12W

Luminous Flux: LED 1400lm/ Lamp 750lm

Size: D75mm, H70mm







LN-CRO-MINI2-35

Power: 3W

Luminous Flux: LED 300lm / Lamp 200lm

Size: D40mm, H32.1mm

Cutout: Ф35mm





























LN-CRO-MINI2-50

Power: 5W

Luminous Flux: LED 500lm / Lamp 350lm

Size: D75mm, H70mm

Cutout: Ф50mm

Beam Angle







0













^{*}Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have ±/10% tolerance and measured at Tr 25% indoors.

^{*}Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.