


RIM SPOT

A charming, delicate recessed system

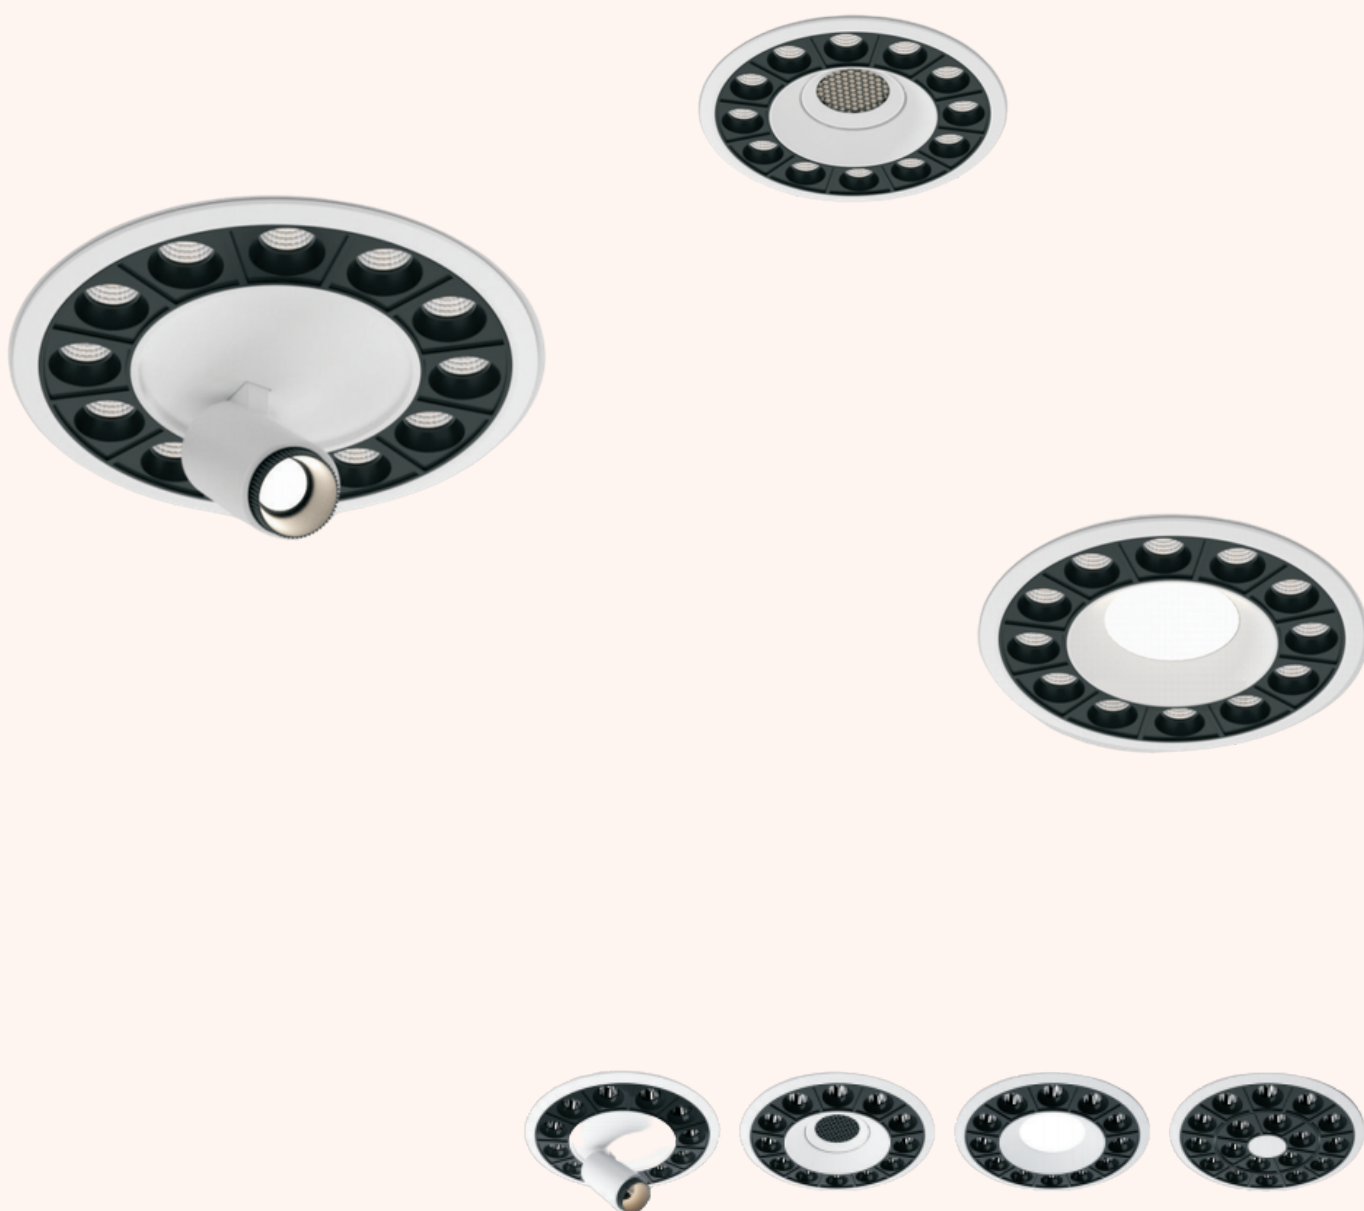

Sustainability

Better light

Safety

Flexibility

Down light

Spotlight

All in one

Track Spot

4 sizes total 28 combinations

All in one

Main Rims



Cover



Down light



Spotlight




Track Spot



Main Rims



Main Rim 6




Cutout: $\Phi 75\text{mm}$


Model: LN-CR-RIM-6	Power: 8W	Luminous flux: LED 850lm / Lamp 560lm
Size: D80xH35mm	Cutout: $\Phi 75\text{mm}$	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Can used separated.

Optional baffle colors



Main Rim 12




Cutout: $\Phi 120\text{mm}$


Model: LN-CR-RIM-12	Power: 15W	Luminous flux: LED 1600lm / Lamp 1050lm
Size: D128xH35mm	Cutout: $\Phi 120\text{mm}$	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Can used separated.

Optional baffle colors



Main Rim 18




Cutout: $\Phi 165\text{mm}$


Model: LN-CR-RIM-18	Power: 20W	Luminous flux: LED 2200lm / Lamp 1450lm
Size: D173xH35mm	Cutout: $\Phi 165\text{mm}$	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Can used separated.

Optional baffle colors



Main Rim 24




Cutout: $\Phi 205\text{mm}$

Model: LN-CR-RIM-24	Power: 20W	Luminous flux: LED 2200lm / Lamp 1450lm
Size: D173xH35mm	Cutout: $\Phi 165\text{mm}$	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Can used separated.


Optional baffle colors



Inner Rims



Inner Rim I12




Fit in: RIM-12/ I12


Model: LN-CR-RIM-I12	Power: 8W	Luminous flux: LED 850lm / Lamp 560lm
Size: D70.4xH35mm	Fit in: Main Rim 12 / Inner Rim 12	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Used with Main rims

Optional baffle colors



Inner Rim I18




Fit in: RIM-18/ I18


Model: LN-CR-RIM-I18	Power: 15W	Luminous flux: LED 1600lm / Lamp 1050lm
Size: D115.4xH35mm	Fit in: Main Rim 18/ Inner Rim I18	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	

Used with Main rims

Optional baffle colors



Inner Rim I24




Fit in: RIM-24

Model: LN-CR-RIM-I24	Power: 20W	Luminous flux: LED 2200lm / Lamp 1450lm
Size: D160.4xH35mm	Fit in: Main Rim 24	Beam angle: 20°/34°/48° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White, Lens: Black;	


Used with Main rims

Optional baffle colors



Down Light Rims

Down Light Rim D12



Fit in: RIM-12/ I12

Model: LN-CR-RIM-D12	Power: 7W	Luminous flux: LED 700lm / Lamp 550lm
Size: D70.4xH35mm	Fit in: Main Rim 12 / Inner Rim I12	Beam angle: 120° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White	

Used with Main rims



0/1-10V

DALI





Opti Beam


High CRI




120°


SMD

Down Light Rim D18



Fit in: RIM-18/ I18

Model: LN-CR-RIM-D18	Power: 10W	Luminous flux: LED 1100lm / Lamp 850lm
Size: D115.4xH35mm	Fit in: Main Rim 18 / Inner Rim I18	Beam angle: 120° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White,	

Used with Main rims



0/1-10V

DALI





Opti Beam


High CRI




120°


SMD

Down Light Rim D24



Fit in: RIM-24

Model: LN-CR-RIM-D24	Power: 15W	Luminous flux: LED 1650lm / Lamp 1250lm
Size: D160.4xH35mm	Fit in: Main Rim 24	Beam angle: 120° URG: <17
LED Chips: SMD OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White	

Used with Main rims



0/1-10V

DALI





Opti Beam

High CRI





120°


SMD

Track Spot Rims



Track Spot Rim TS12



Fit in: RIM-12 / I12


Model: LN-CR-RIM-TS12	Power: 3W	Luminous flux: LED 300lm / Lamp 180lm
Size: Body D25xL47mm; Base D70.4xH19mm	Fit in: Main Rim 12 / Inner Rim I12	Beam angle: 20°~ 50° URG: <17
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White; Ring: optional;	

Used with Main rims

Optional baffle colors



Track Spot Rim TS18



Fit in: RIM-18/ I18


Model: LN-CR-RIM-TS18	Power: 8W	Luminous flux: LED 840lm / Lamp 500lm
Size: Body D35xL74mm; Base D115.4xH19mm	Fit in: Main Rim 18 / Inner Rim I18	Beam angle: 20° ~ 50° URG: <17
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White; Ring: optional	

Used with Main rims

Optional baffle colors



Track Spot Rim TS24



Fit in: RIM-24

Model: LN-CR-RIM-TS24	Power: 12W	Luminous flux: LED 1250lm / Lamp 900lm
Size: Body D50xL99mm; Base D160.4xH19mm	Fit in: Main Rim 24	Beam angle: 20° ~ 50° URG: <17
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White; Ring: optional;	

Used with Main rims


Optional baffle colors




Spotlight Rims




Spotlight Rim S12




Model: LN-CR-RIM-S12	Power: 7W	Luminous flux: LED 800lm / Lamp 500lm
Size: D70.4xH56.3mm	Fit in: Main Rim 12 / Inner RIM I12	Beam angle: 12°/24°/36° URG: <17
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White	
Used with Main rims	Anti-glare accessories: honeycomb	

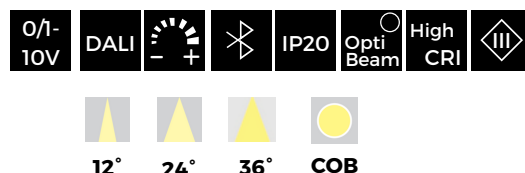


Spotlight Rim S18




Model: LN-CR-RIM-S18		Power: 12W	Luminous flux: LED 1250lm / Lamp 900lm				
Size: D115.4xH77.2mm		Fit in: Main Rim 18 / Inner Rim I18	Beam angle: 15°/24°/36°		URG: <17		
LED Chips: SMD OSRAM		Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH					
Materials: Die-casting Aluminum		Housing Colors: White					
Used with Main rims	Anti-glare accessories: honeycomb						

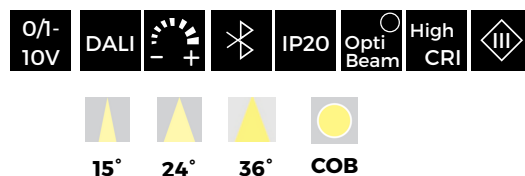

Spotlight Rim S24



Model: LN-CR-RIM-S24	Power: 20W	Luminous flux: LED 2200lm / Lamp 1450lm
Size: D160.4xH101.8mm	Fit in: Main Rim 24	Beam angle: 12°/24°/36° URG: <17
LED Chips: COB CREE/OSRAM	Driver: C.C. OSRAM/LIFUD/KEGU/ANXIONG/LTECH	
Materials: Die-casting Aluminum	Housing Colors: White	
Used with Main rims Anti-glare accessories: honeycomb		

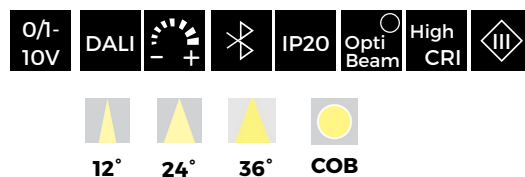

Cover Rims



*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Different power, CRI, C.C.T, or other LED chip / driver brands, or dimming functions, or emergency kit with specific duration, please contact with us.

*Dimensions and specifications subject to alterations without notice.

RIM SPOT

A charming, delicate recessed system

