



t +86-760-22343190
m +86 173 2816 2503
e sales@luna-lighting.cn
www.luna-lighting.com

Square Stretch adjustable Recessed spotlight-FS3




Recessed Telescopic spotlights.

The lamp shell is made of efficient aluminum die-casting aluminum material, the surface is white spray treatment, fadeless, corrosion resistant, minimalist appearance design, large light range, no dead Angle of light beam 360° rotating irradiation goods expansion, horizontal rotation, expansion at will.

This product uses CREE/OSRAM SMD high-power LED chip and high quality isolation circuit power supply drive to ensure reliable quality.

The series offers a variety of optical effects :12/24/38/ corner, wall wash effect, anti-glare design, LUNA LED strobe control to invisible category, making the light more delicate and even, making the visual experience of human eyes more soft and natural, making families comfortable and at ease.

This series of products can be used in shopping malls, shopping centers, exhibition halls, offices and other places, with high CRI, soft, warm, comfortable lighting effects.

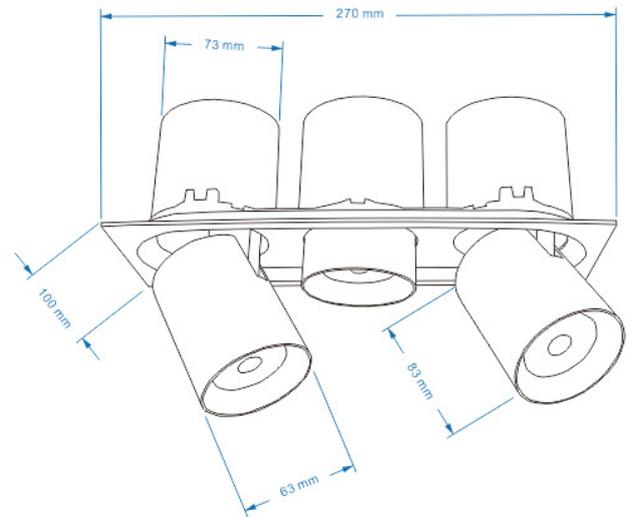

Product model: LN-CRXLS-FS3

Electrical

Power	5-12W*3
Input voltage	AC220-240V
Frequency	50..60Hz
Driver options	OSRAM, PHILIPS, KEGU, LIFUD, Anxiong
Dimming	on/off, TRAIC, 0/1-10V, DALI, Mesh
Class	III SELV
Ambient temperature	0 - 40°C
Relative humidity	<85%

LED

LED brand options	CREE, OSRAM, PHILIPS
LED Qty	3
LED type	COB
C.C.T.	3000K,4000K,6000K
CRI	>80, >90
Lumen maintenance	LM80
SDCM	4

Optical

Beam angle °	12,24,38
Luminous flux (LED)* lm	4320
Lumen efficiency (LED)* lm/W	120
Luminous flux (Luminare)* lm	2700
Lumen efficiency (Luminare)* lm/W	75

Material

Body & heatsink	Die-casting aluminum
Housing	Die-casting aluminum
Optics	PMMA
Surface treatment	Powder coated
Color options	Sanded White
IP grade	IP20

Installation

Location	Interior
Fixition	Ceiling Recessed
Size mm	W100*L270*H120mm
Cutout mm	φ260*90mm
Certificates	CE

On request

- different power, CRI, C.C.T..

- other LED Brands, CREE, OSRAM, SAMSUNG, Bridgelux, etc.
- other Drivers, OSRAM, PHILIPS, Meanwell, KEGU, Lifud, etc.
- dimming functions: TRIAC, 0/1-10V, DALI, Mesh, 2.4G
- emergency kit with specific duration.

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Dimensions and specifications subject to alterations without notice.

Add: NO.16 Industrial 2nd Road, Caosan, Guzhen, Zhongshan,
Guangdong, China . www.luna-lighting.com Email: sales@luna-lighting.cn Wechat: Luna_lighting

LUNA Mcfion Lighting Factory @ Copyright 2020